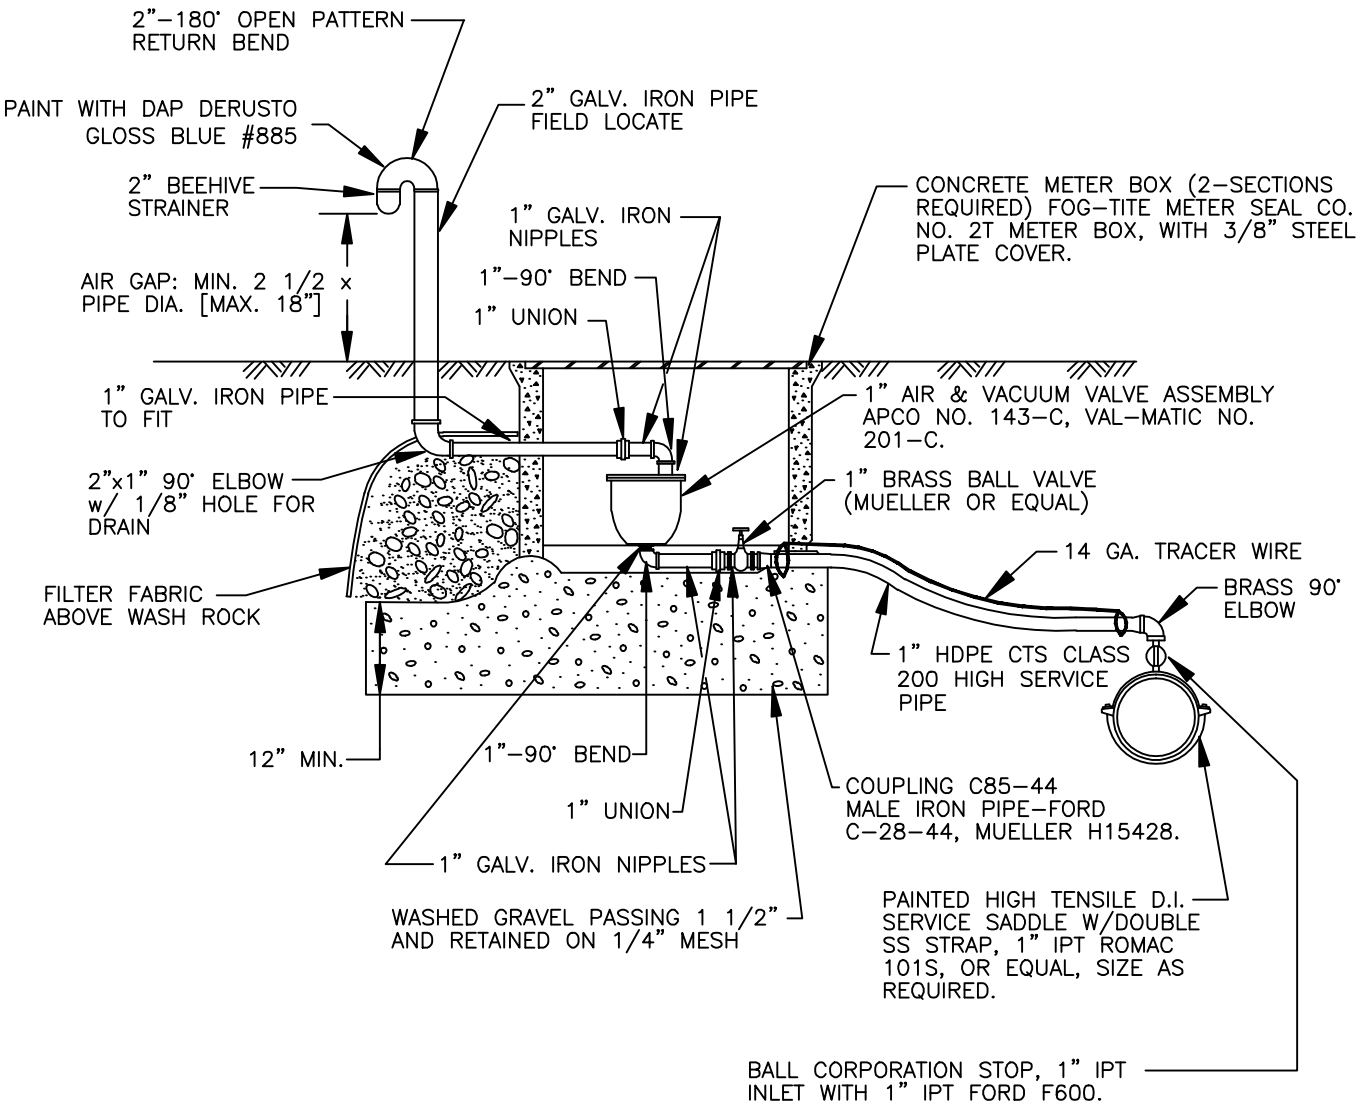

NOTES:

1. ALL FITTINGS TO BE BRASS OR COPPER FROM WATER MAIN TO 1" AIR & VACUUM ASSEMBLY.
2. AIR & VACUUM RELEASE VALVE ASSEMBLY MUST BE INSTALLED AT THE HIGHEST POINT OF THE LINE. IF THE HIGH POINT FALLS IN A LOCATION WHERE ASSEMBLY CANNOT BE INSTALLED, PROVIDE ADDITIONAL DEPTH OF LINE TO CREATE HIGH POINT AT A LOCATION WHERE ASSEMBLY CAN BE INSTALLED.

CITY OF ARLINGTON	APPROVED BY	L. OLIVE	*DEPARTMENT OF PUBLIC WORKS* STANDARD DETAILS	STANDARD DETAIL NUMBER
	DATE	07/31/2008		
	REF STAD SPEC		1" COMBINATION AIR VALVE ASSEMBLY	W–260