



EXISTING ASPHALT CONCRETE OVER CEMENT CONCRETE

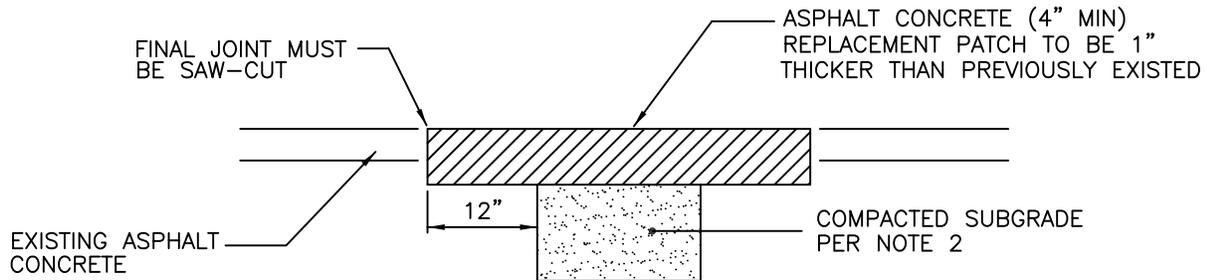

EXISTING ASPHALT CONCRETE OVER PREPARED GRADE

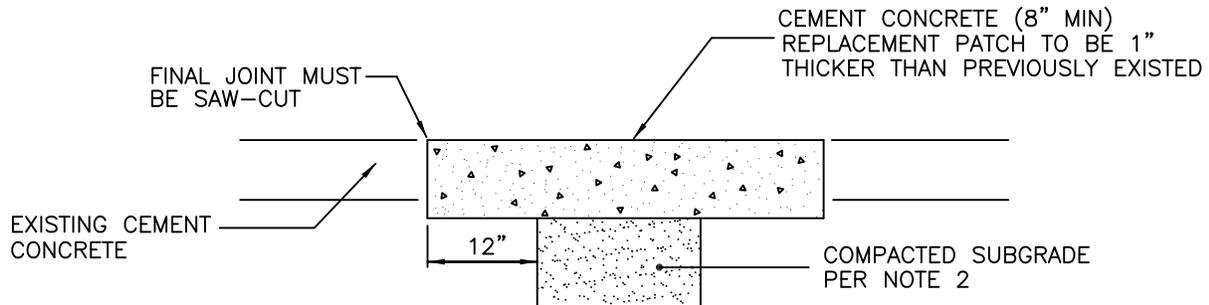

EXISTING CEMENT CONCRETE OVER PREPARED GRADE

NOTES:

1. ALL TRENCHES IN ROADWAY AREAS SHALL BE BACKFILLED AND PATCHED WITH TEMPORARY ASPHALT AT THE END OF EACH WORK DAY, UNLESS PERMISSION IS GRANTED TO DO OTHERWISE BY THE CITY ENGINEER.
2. COMPACTED SUBGRADE MATERIAL SHALL BE PER WSDOT 9-03.9(3), 5/8" MINUS CRUSHED SURFACING OR APPROVED NATIVE MATERIAL. SUBGRADE SHALL BE COMPACTED TO 95% MAXIMUM DENSITY.
3. ALL TEMPORARY PATCHES ON TRENCHES SHALL BE PERMANENTLY PATCHED WITHIN 2 WEEKS OF COMPLETION OF WORK WITHIN THE ROADWAY AREA.



APPROVED BY	R. MORRISON
DATE	6/2021
REF STD SPEC	

DEPARTMENT OF PUBLIC WORKS STANDARD DETAILS
ROADWAY PAVEMENT PATCH

STANDARD DETAIL NUMBER
R-140